

# Accessories



# ACCESSORIES

Series	Size	Page
<b>Accessories</b>		
Inductive Proximity Switches IN		954
IN	5	956
IN	8	958
IN	40	960
IN	60	962
IN	65	964
IN	80	966
IN	8-80/80SL	968
IN	120	970
Reed Switches RMS		972
RMS	22	974
RMS	80	976
Magnetic Switches MMS		978
MMS	22	980
MMS	22-SA	982
MMS	30	984
Switch Accessories		
SST		986
NHG		990
Connectors/Feeder Cables		994
Sensor Testers		998
Sensor Distributor		1000
V 2		1002
V 4		1006
V 8		1010
Measuring Systems		
APS-M1		1014
FPS/FPS-A/FPS Software		1018
FMS/FMS-A/FMS-ZBA/-ZBP		1026
Finger Blanks and Intermediate Jaws		1036
ABR for MPG		1038
ABR for MPZ		1042
ABR-plus/SBR-plus		1044
ABR for PGN/PZN		1048
RB for KTG		1052
RB for KGG		1054
RB for DKG-RR		1058
ASB/SBR for UFG		1060
ZBH for PFH		1062
Clamping Inserts for Gripper Fingers		
Quentes		1066
HM		1068
HKI		1070

Series	Size	Page
<b>Accessories</b>		
Fastening Elements		
Guide Sleeves		1072
PAM		1074
Valves and Screw Connections		1076
SDV-P		1078
WV		1080
SWV		1082
DSV		1084



## Inductive Proximity Switches

Inductive proximity switches are used to monitor the current position of automation components. They are available from SCHUNK in the versions IN (sensor with 30 cm molded cable and cable connector) or INK (sensor with 2 m long feeder cable and litz wires for wiring).



### Function description

With their oscillator coil, inductive proximity switches produce a high-frequency, alternating magnetic field. This field occurs on the active surface of the sensor. If a metal object enters the field, it draws energy from the magnetic field, thereby reducing the oscillation amplitude. This change is detected, and the sensor switches.

### Your advantages and benefits

#### Mounting through bracket

for simple, fast assembly

#### Version with LED display

for checking the switching state directly at the sensor

#### Version with connector

for easy, rapid replacement of the extension cable

#### Ultra-flexible PUR cable

for a long life and resistance to many chemicals

#### Proximity switch can be installed flush

for minimal interfering contours in the application

## Application example



1 Plug-in IN Sensors

2 PSK Swivel Head

3 PGN 2-Finger Parallel Gripper  
with ABR finger blanks

4 PZN 3-Finger Centric Gripper  
with workpiece-specific  
gripper fingers

## Area of application

For monitoring of gripping and rotary modules, linear modules and robot accessories. Inductive SCHUNK sensors detect metals without contact and are resistant to vibration, dust and humidity.

## General information

### Protection class according to DIN 40050

IP 67 when connected

### Voltage

10 – 30 V DC, residual ripple < 15 %

### Switching method

PNP switching

### Warranty

24 months

## Notes


SCHUNK gripping, rotary and linear modules and robot accessory components must always be ordered from SCHUNK with the matching sensors, as these are ideally adapted to work together.

If major characteristics such as switching distance, switching function, hysteresis and voltage are largely the same, then proximity switches from other manufacturers may be used instead of inductive proximity switches (IN, INK) from SCHUNK.

However, if proximity switches from other manufacturers are used, SCHUNK cannot guarantee either their function or their functional reliability.




### Circuit diagram of closer

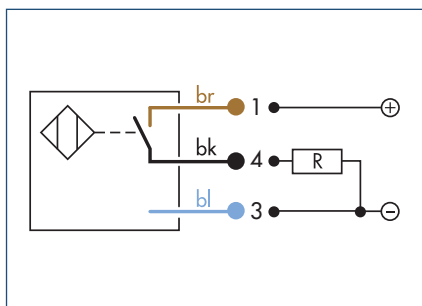

### Technical data


Description	IN 5/S-M8		IN 5/S-M12	
	ID	0301469	0301569	0301501
Switching function		Closer	Closer	Closer
Switching distance	[mm]	1.0	1.0	1.0
Hysteresis of nominal switching distance		< 15%	< 15%	< 15%
Switching method		PNP	PNP	PNP
Cable length	[cm]	30.0	30.0	200.0
Cable connector/cable end		M8	M12	Open wire
Type of voltage		DC	DC	DC
Nominal voltage	[V]	24.0	24.0	24.0
Min. voltage	[V]	10.0	10.0	10.0
Max. voltage	[V]	30.0	30.0	30.0
Voltage drop	[V]	1.5	1.5	1.5
Max. power on contact	[A]	0.2	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0	1000.0
IP rating (sensor)		67	67	67
IP rating (connector, plugged in)		67	67	67
LED display on sensor		No	No	No
Cable diameter	[mm]	3.5	3.5	3.5
Min. bending radius (dynamic)	[mm]	35.0	35.0	35.0
Min. bending radius (static)	[mm]	17.5	17.5	17.5
No. of wires		3	3	3
Wire cross section	[mm <sup>2</sup> ]	0.14	0.14	0.14

### IN 5/S sensor

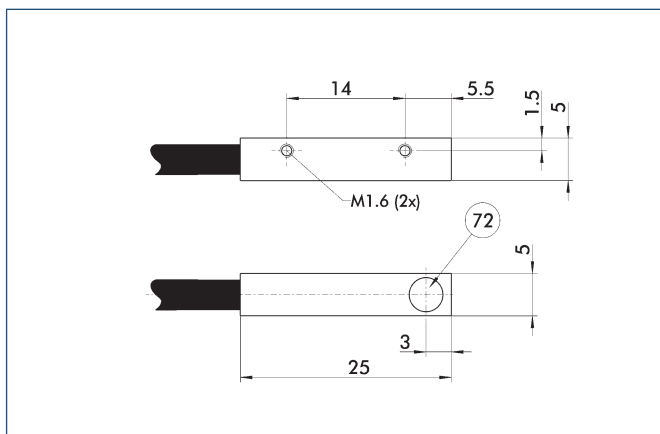


72 Active sensor surface


### M8 connector

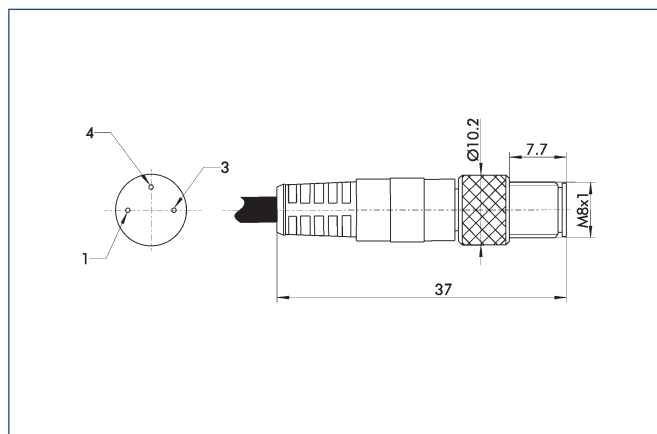

### M12 connector

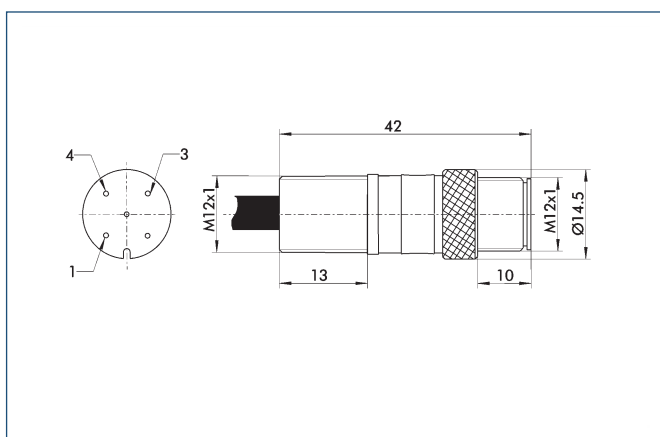


### Circuit diagram of closer

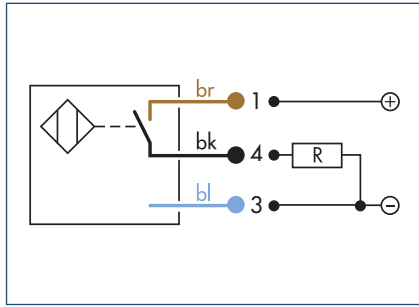

### Technical data


Description		IN 8/S-M8	IN 8/S-M12	IN 8/S
	ID	0301481	0301581	9700052
Switching function		Closer	Closer	Closer
Switching distance	[mm]	0.8	0.8	0.8
Hysteresis of nominal switching distance		< 15%	< 15%	< 15%
Switching method		PNP	PNP	PNP
Cable length	[cm]	30.0	30.0	200.0
Cable connector/cable end		M12	M12	Open wire
Type of voltage		DC	DC	DC
Nominal voltage	[V]	24.0	24.0	24.0
Min. voltage	[V]	10.0	10.0	10.0
Max. voltage	[V]	30.0	30.0	30.0
Voltage drop	[V]	1.5	1.5	1.5
Max. power on contact	[A]	0.2	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0	1000.0
IP rating (sensor)		67	67	67
IP rating (connector, plugged in)		67	67	67
LED display on sensor		No	No	No
Cable diameter	[mm]	3.5	3.5	3.5
Min. bending radius (dynamic)	[mm]	35.0	35.0	35.0
Min. bending radius (static)	[mm]	17.5	17.5	17.5
No. of wires		3	3	3
Wire cross section	[mm <sup>2</sup> ]	0.14	0.14	0.14

### IN 8/S sensor

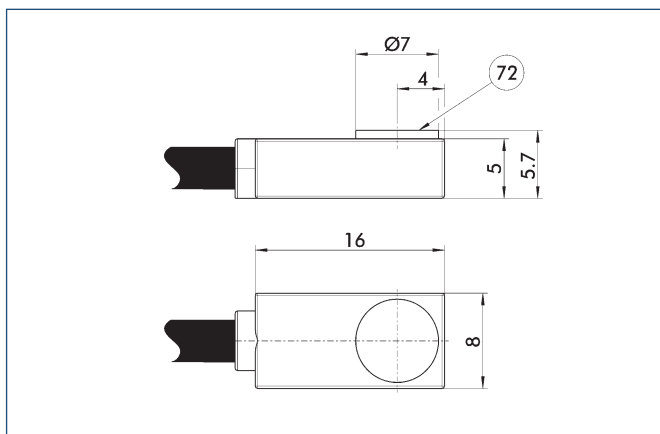


72 Active sensor surface

### M8 connector

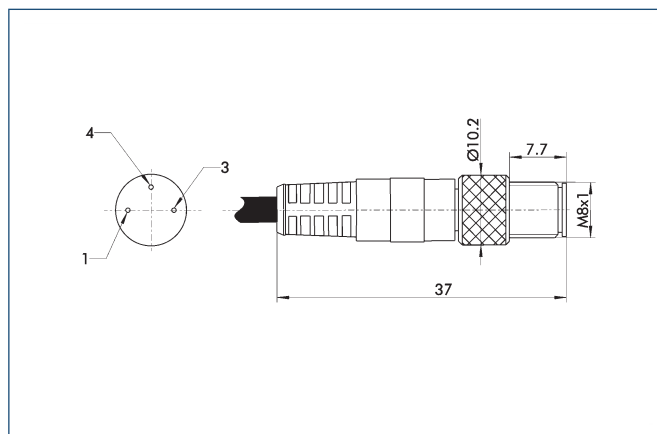


### M12 connector

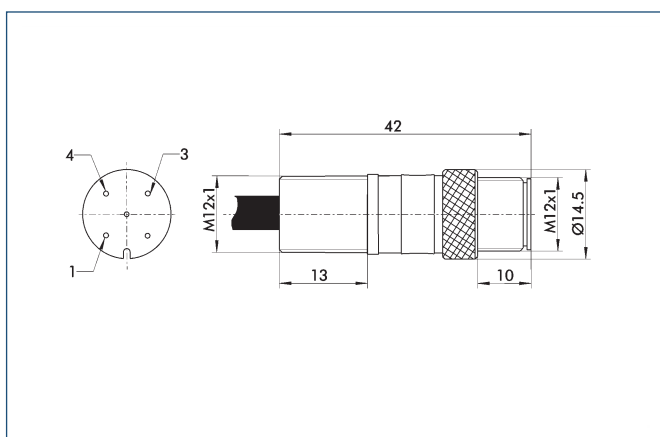




### Circuit diagram of closer

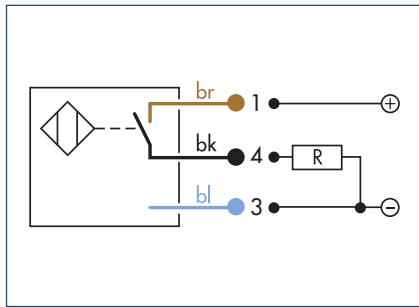


### Circuit diagram of opener

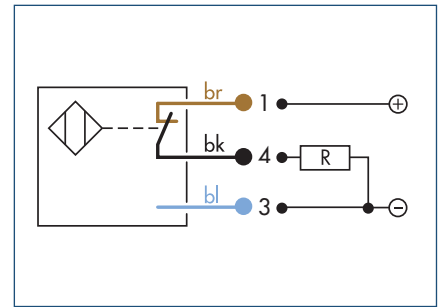

## Technical data


Description		IN 40/S-M8	IN 40/S-M12	INK 40/S	IN 40/O-M8	IN 40/O-M12	INK 40/O
	ID	0301474	0301574	0301555	0301484	0301584	0301556
Switching function		Closer	Closer	Closer	Opener	Opener	Opener
Switching distance	[mm]	0.8	0.8	0.8	0.8	0.8	0.8
Hysteresis of nominal switching distance		< 15%	< 15%	< 15%	< 15%	< 15%	< 15%
Switching method		PNP	PNP	PNP	PNP	PNP	PNP
Cable length	[cm]	30.0	30.0	200.0	30.0	30.0	200.0
Cable connector/cable end		M8	M12	Open wire	M8	M12	Open wire
Type of voltage		DC	DC	DC	DC	DC	DC
Nominal voltage	[V]	24.0	24.0	24.0	24.0	24.0	24.0
Min. voltage	[V]	10.0	10.0	10.0	10.0	10.0	10.0
Max. voltage	[V]	30.0	30.0	30.0	30.0	30.0	30.0
Voltage drop	[V]	1.5	1.5	1.5	1.5	1.5	1.5
Max. power on contact	[A]	0.2	0.2	0.2	0.2	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0	-25.0	-25.0	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0	70.0	70.0	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0	1000.0	1000.0	1000.0	1000.0
IP rating (sensor)		67	67	67	67	67	67
IP rating (connector, plugged in)		67	67	67	67	67	67
LED display on sensor		Yes	Yes	Yes	Yes	Yes	Yes
Cable diameter	[mm]	3.5	3.5	3.5	3.5	3.5	3.5
Min. bending radius (dynamic)	[mm]	35.0	35.0	35.0	35.0	35.0	35.0
Min. bending radius (static)	[mm]	17.5	17.5	17.5	17.5	17.5	17.5
No. of wires		3	3	3	3	3	3
Wire cross section	[mm <sup>2</sup> ]	0.14	0.14	0.14	0.14	0.14	0.14

### IN 40 sensor

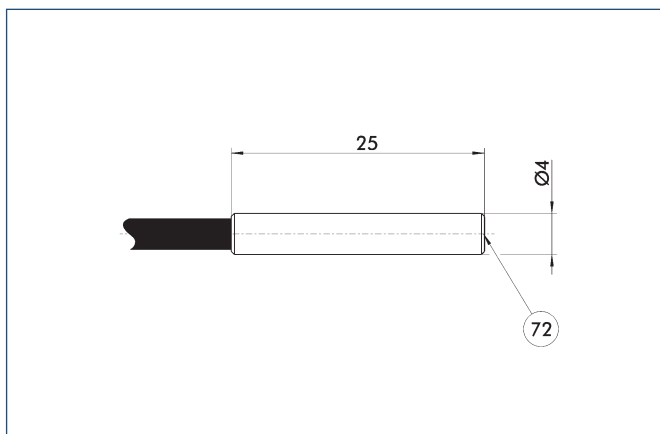


72 Active sensor surface


### M8 connector

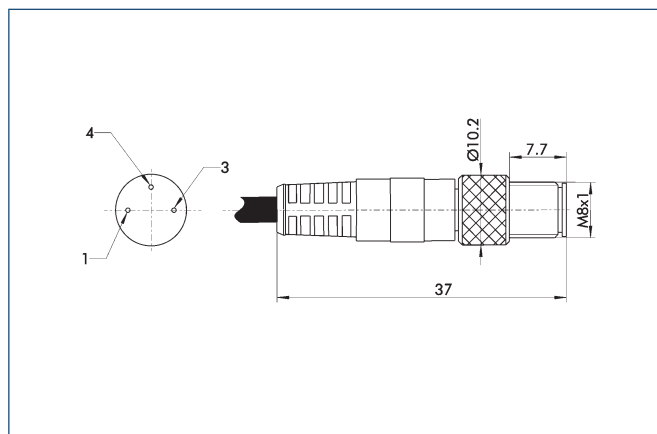

### M12 connector

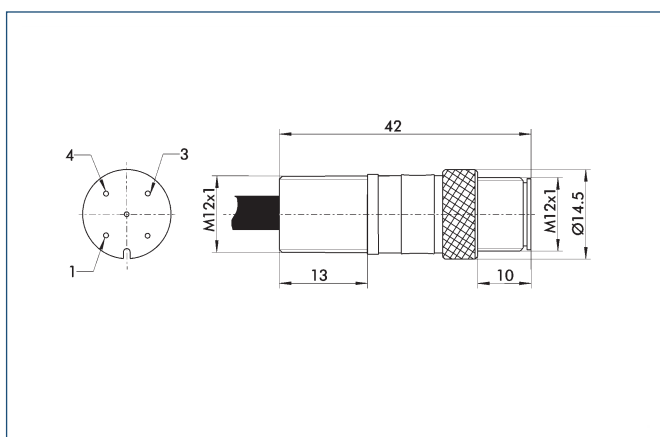


### Circuit diagram of closer

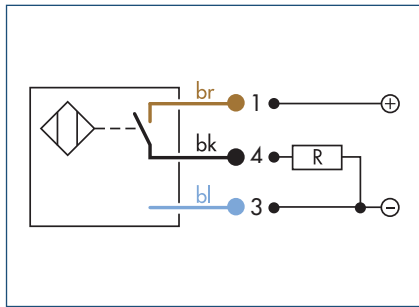

### Technical data


Description	ID	IN 60/S-M8	IN 60/S-M12	IN K 60/S
		0301485	0301585	0301553
Switching function		Closer	Closer	Closer
Switching distance	[mm]	1.5	1.5	1.5
Hysteresis of nominal switching distance		< 15%	< 15%	< 15%
Switching method		PNP	PNP	PNP
Cable length	[cm]	30.0	30.0	200.0
Cable connector/cable end		M8	M12	Open wire
Type of voltage		DC	DC	DC
Nominal voltage	[V]	24.0	24.0	24.0
Min. voltage	[V]	10.0	10.0	10.0
Max. voltage	[V]	30.0	30.0	30.0
Voltage drop	[V]	1.5	1.5	1.5
Max. power on contact	[A]	0.2	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0	1000.0
IP rating (sensor)		67	67	67
IP rating (connector, plugged in)		67	67	67
LED display on sensor		No	No	No
Cable diameter	[mm]	3.5	3.5	3.5
Min. bending radius (dynamic)	[mm]	35.0	35.0	35.0
Min. bending radius (static)	[mm]	17.5	17.5	17.5
No. of wires		3	3	3
Wire cross section	[mm <sup>2</sup> ]	0.14	0.14	0.14

### IN 60/S sensor

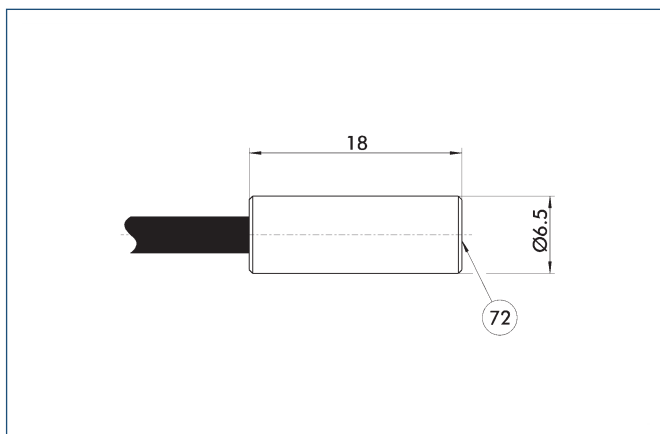


72 Active sensor surface


### M8 connector

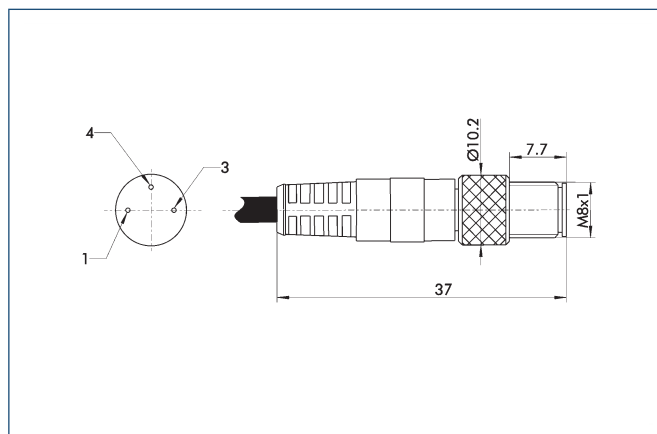

### M12 connector

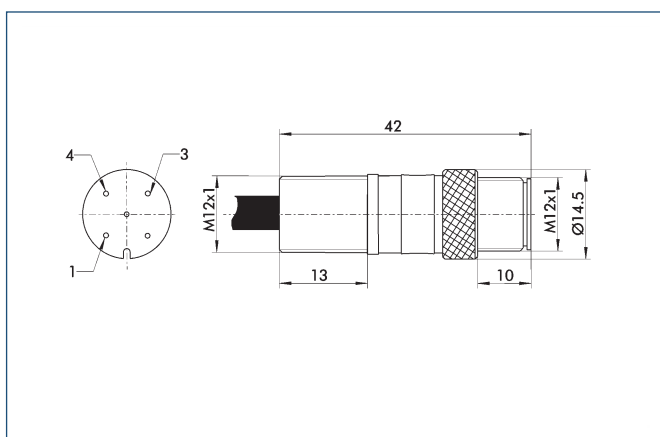


### Circuit diagram of closer

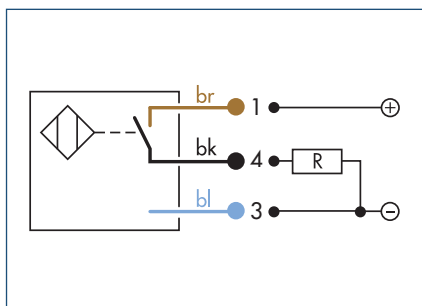

### Technical data

Description	ID	IN 65/S-M8	IN 65/S-M12	IN K 65/S
		0301476	0301576	0301554
Switching function		Closer	Closer	Closer
Switching distance	[mm]	1.5	1.5	1.5
Hysteresis of nominal switching distance		< 15%	< 15%	< 15%
Switching method		PNP	PNP	PNP
Cable length	[cm]	30.0	30.0	200.0
Cable connector/cable end		M8	M12	Open wire
Type of voltage		DC	DC	DC
Nominal voltage	[V]	24.0	24.0	24.0
Min. voltage	[V]	10.0	10.0	10.0
Max. voltage	[V]	30.0	30.0	30.0
Voltage drop	[V]	1.5	1.5	1.5
Max. power on contact	[A]	0.2	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0	1000.0
IP rating (sensor)		67	67	67
IP rating (connector, plugged in)		67	67	67
LED display on sensor		Yes	Yes	No
Cable diameter	[mm]	3.5	3.5	3.5
Min. bending radius (dynamic)	[mm]	35.0	35.0	35.0
Min. bending radius (static)	[mm]	17.5	17.5	17.5
No. of wires		3	3	3
Wire cross section	[mm <sup>2</sup> ]	0.14	0.14	0.14


### IN 65/S sensor

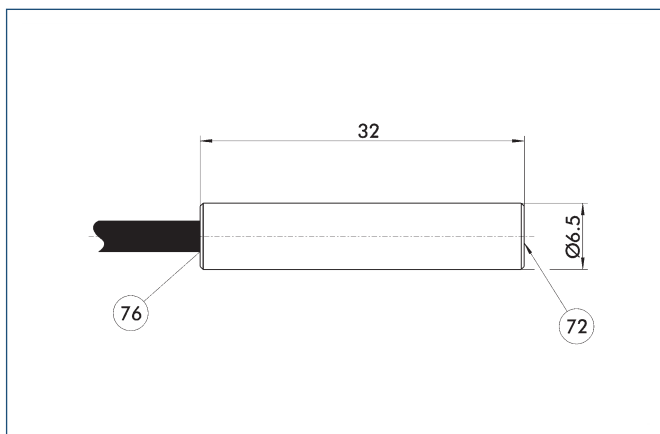


72 Active sensor surface

76 LED

### M8 connector

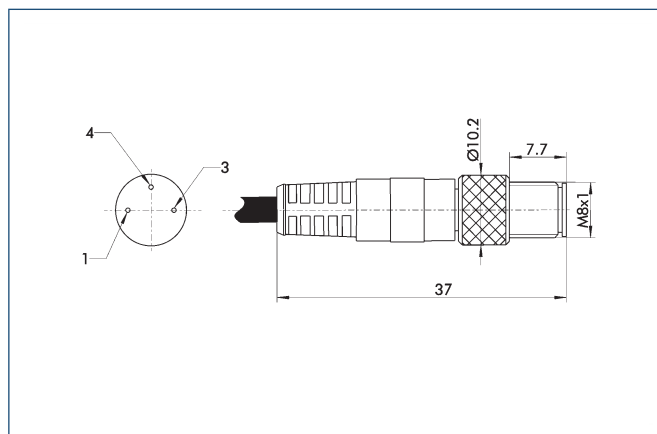


### M12 connector

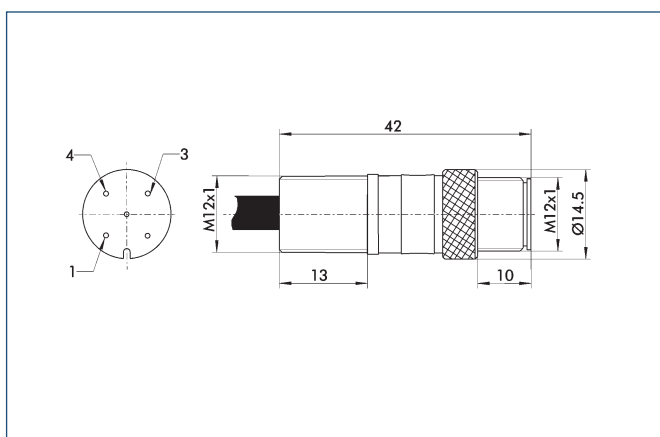




### Circuit diagram of closer

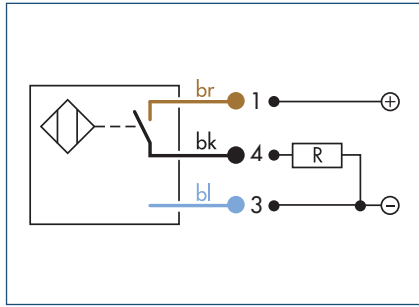


### Circuit diagram of opener

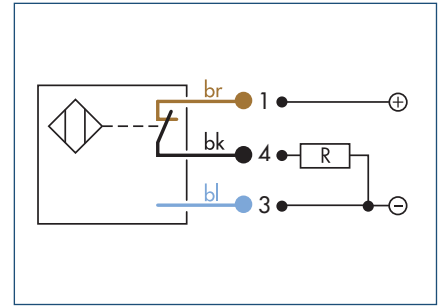

## Technical data

Description		IN 80/S-M8	IN 80/S-M12	INK 80/S	IN 80/O-M8	IN 80/O-M12	INK 80/O
	ID	0301478	0301578	0301550	0301488	0301588	0301551
Switching function		Closer	Closer	Closer	Opener	Opener	Opener
Switching distance	[mm]	1.5	1.5	1.5	1.5	1.5	1.5
Hysteresis of nominal switching distance		< 15%	< 15%	< 15%	< 15%	< 15%	< 15%
Switching method		PNP	PNP	PNP	PNP	PNP	PNP
Cable length	[cm]	30.0	30.0	200.0	30.0	30.0	200.0
Cable connector/cable end		M8	M12	Open wire	M8	M12	Open wire
Type of voltage		DC	DC	DC	DC	DC	DC
Nominal voltage	[V]	24.0	24.0	24.0	24.0	24.0	24.0
Min. voltage	[V]	10.0	10.0	10.0	10.0	10.0	10.0
Max. voltage	[V]	30.0	30.0	30.0	30.0	30.0	30.0
Voltage drop	[V]	1.5	1.5	1.5	1.5	1.5	1.5
Max. power on contact	[A]	0.2	0.2	0.2	0.2	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0	-25.0	-25.0	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0	70.0	70.0	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0	1000.0	1000.0	1000.0	1000.0
IP rating (sensor)		67	67	67	67	67	67
IP rating (connector, plugged in)		67	67	67	67	67	67
LED display on sensor		Yes	Yes	Yes	Yes	Yes	Yes
Cable diameter	[mm]	3.5	3.5	3.5	3.5	3.5	3.5
Min. bending radius (dynamic)	[mm]	35.0	35.0	35.0	35.0	35.0	35.0
Min. bending radius (static)	[mm]	17.5	17.5	17.5	17.5	17.5	17.5
No. of wires		3	3	3	3	3	3
Wire cross section	[mm <sup>2</sup> ]	0.14	0.14	0.14	0.14	0.14	0.14


### IN 80 sensor

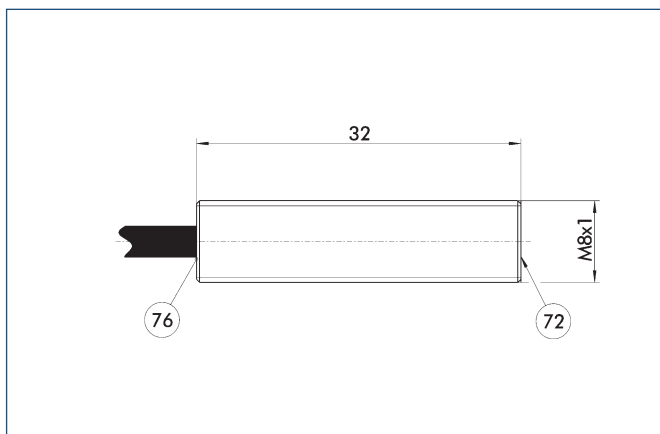


72 Active sensor surface

76 LED


### M8 connector

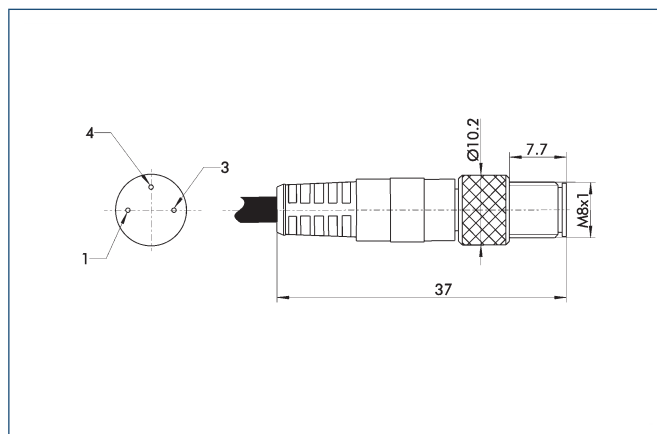

### M12 connector

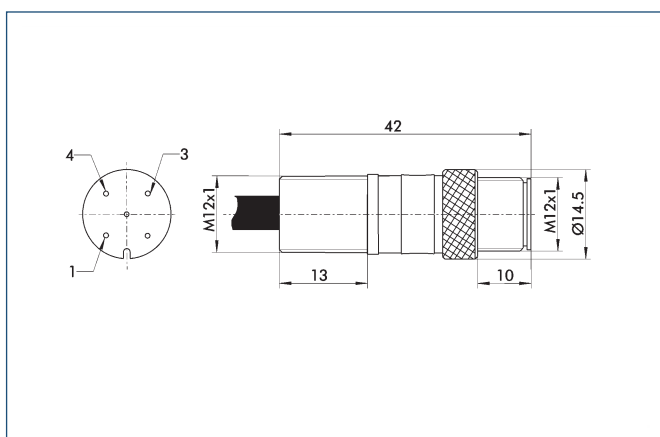


### Circuit diagram of closer

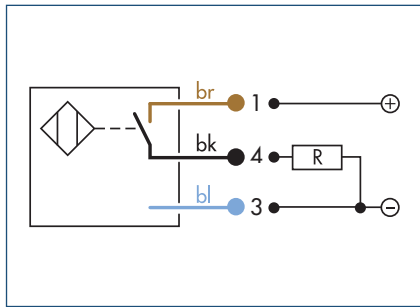

### Technical data


Description	IN-B 80/S-M8		IN 80/SL-M12	
	ID	0301477	0301529	0301579
Switching function		Closer	Closer	Closer
Switching distance	[mm]	1.5	3.0	3.0
Hysteresis of nominal switching distance		< 15%	< 15%	< 15%
Switching method		PNP	PNP	PNP
Cable length	[cm]		30.0	200.0
Cable connector/cable end		M8	M12	Open wire
Type of voltage		DC	DC	DC
Nominal voltage	[V]	24.0	24.0	24.0
Min. voltage	[V]	10.0	10.0	10.0
Max. voltage	[V]	30.0	30.0	30.0
Voltage drop	[V]	1.5	1.5	1.5
Max. power on contact	[A]	0.2	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0	1000.0
IP rating (sensor)		67	67	67
IP rating (connector, plugged in)		67	67	67
LED display on sensor		Yes	Yes	Yes
Cable diameter	[mm]		3.5	3.5
Min. bending radius (dynamic)	[mm]		35.0	35.0
Min. bending radius (static)	[mm]		17.5	17.5
No. of wires/contacts		3	3	3
Wire cross section	[mm <sup>2</sup> ]		0.14	0.14

## IN B-80 sensor

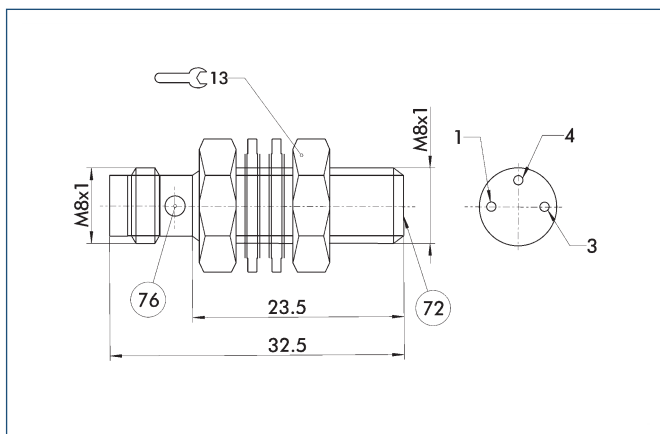


- 72 Active sensor surface
- 76 LED

## IN 80/SL sensor

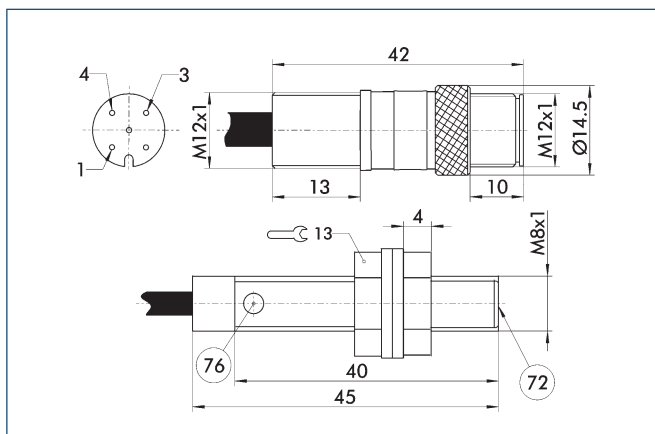

- 72 Active sensor surface
- 76 LED


### Circuit diagram of closer

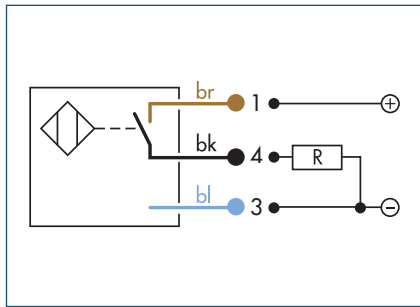

### Technical data

Description		IN 120/S-M12	INK 120/S
	ID	0301592	0301562
Switching function		Closer	Closer
Switching distance	[mm]	2.0	2.0
Hysteresis of nominal switching distance		< 15%	< 15%
Switching method		PNP	PNP
Cable length	[cm]	30.0	200.0
Cable connector/cable end		M12	Open wire
Type of voltage		DC	DC
Nominal voltage	[V]	24.0	24.0
Min. voltage	[V]	10.0	10.0
Max. voltage	[V]	30.0	30.0
Voltage drop	[V]	1.5	1.5
Max. power on contact	[A]	0.2	0.2
Min. ambient temperature	[°C]	-25.0	-25.0
Max. ambient temperature	[°C]	70.0	70.0
Max. switching frequency	[Hz]	1000.0	1000.0
IP rating (sensor)		67	67
IP rating (connector, plugged in)		67	67
LED display on sensor		No	No
Cable diameter	[mm]	3.5	3.5
Min. bending radius (dynamic)	[mm]	35.0	35.0
Min. bending radius (static)	[mm]	17.5	17.5
No. of wires		3	3
Wire cross section	[mm <sup>2</sup> ]	0.14	0.14

### IN 120/S sensor

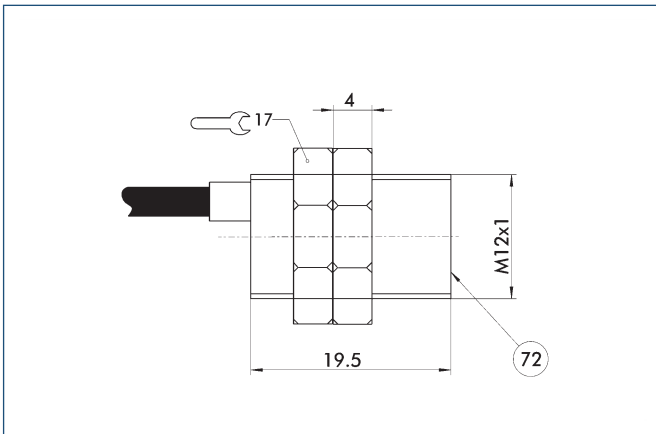

72 Active sensor surface

### M12 connector

